

UNIVERSITEIT VAN PRETORIA
UNIVERSITY OF PRETORIA
YUNIBESITHI YA PRETORIA

Denkleiers • Leading Minds • Dikgopolo tša Dihlalefi

Calibration of a Modular Dish Design using Lunar Flux Mapping

Presented by: Jonathan Kyle Swanepoel
Supervisors: Dr W.G. Le Roux and Dr A. Lexmond

Clean Energy Research Group (CERG)


Overview

- **Introduction**
- **Problem**
- **Research Objectives**
- **Research Methodology**
- **Current Progress**
 - Preliminary Testing
 - Modular Dish Design
 - Modular Dish Calibration
 - Preliminary Optical Analysis
- **Research to Follow**
- **Industrial Implications**
- **Conclusion**



Introduction

- Increasing demand for off-grid power generation in rural Africa.
- Settlements and farmsteads experience inflated rates for electricity or are not reached all-together.
- An experimental study on the efficiency of a small-scale solar thermal Rankine cycle using direct steam generation.

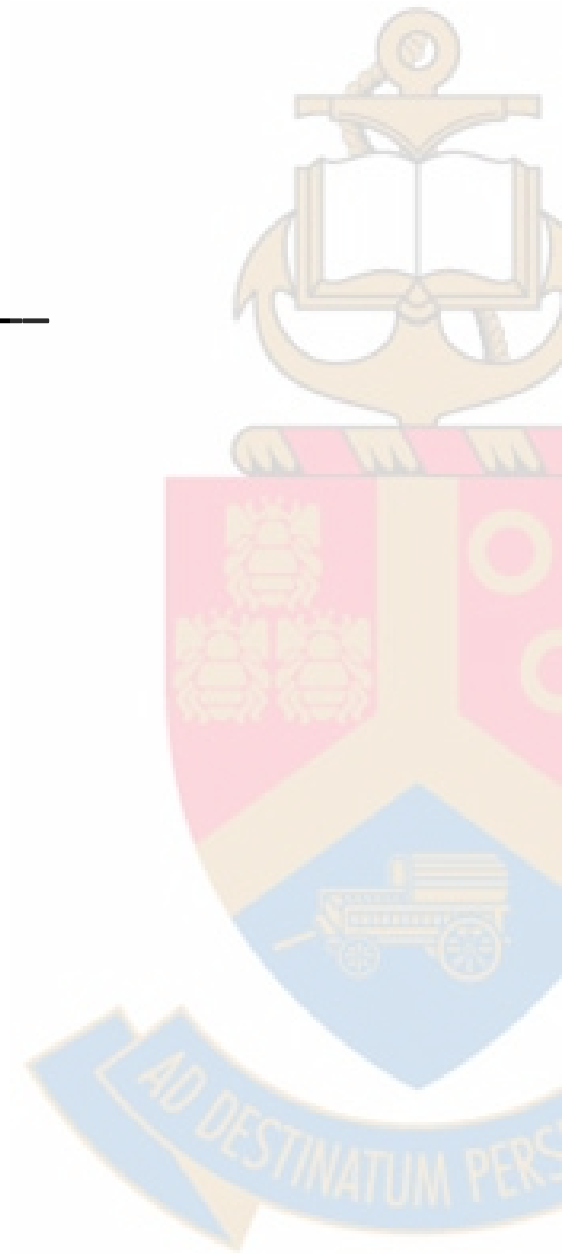



Problem

- Focus has shifted towards large scale CSP, supplying directly to the grid.
- Relevant research is outdated or does not take into account the conditions within sub-Saharan Africa.




Research Objectives

Determine the potential for direct steam generation solar thermal Rankine cycles, at distributed scale, to assist in meeting the needs of powering rural settlements.

- Develop a solar concentrator that can be locally manufactured out of affordable materials.
- Analyse the efficiency of a simple cavity receiver design in a Rankine cycle power generation process.




Research Methodology

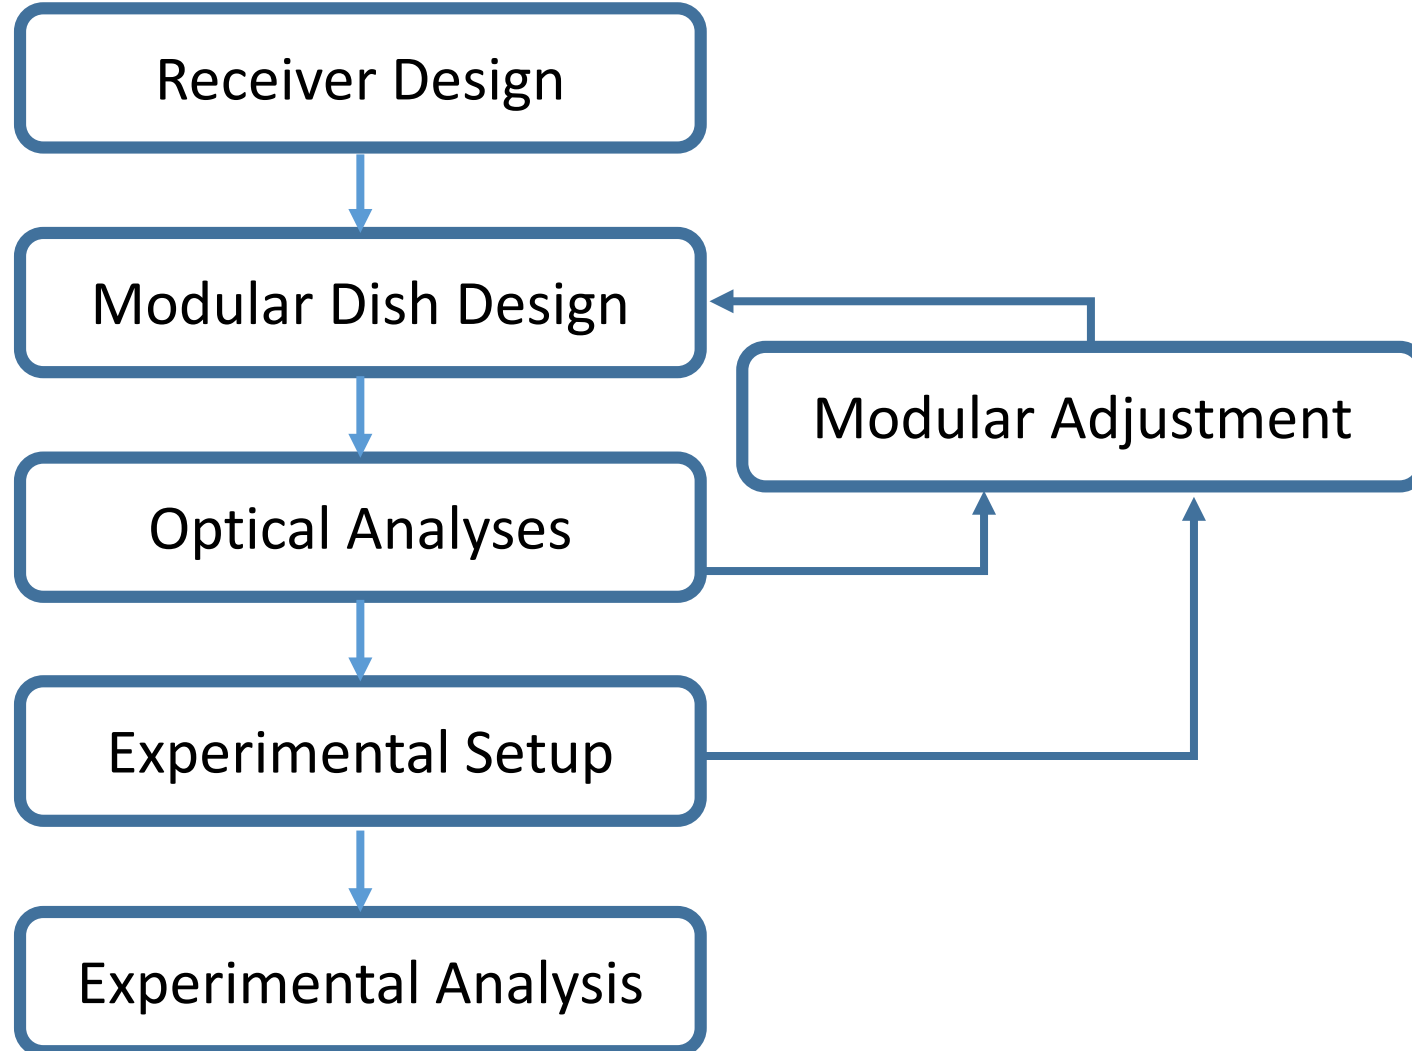


Current Progress – Receiver Design

- Receiver cavity designed through basic analytical methods.
- The experimental model differed largely from the analytical design.
 - Materials were sourced locally, within a budget at the time.
 - The receiver was manufactured by students.
- This lends itself towards manufacturing simplicity in industry.

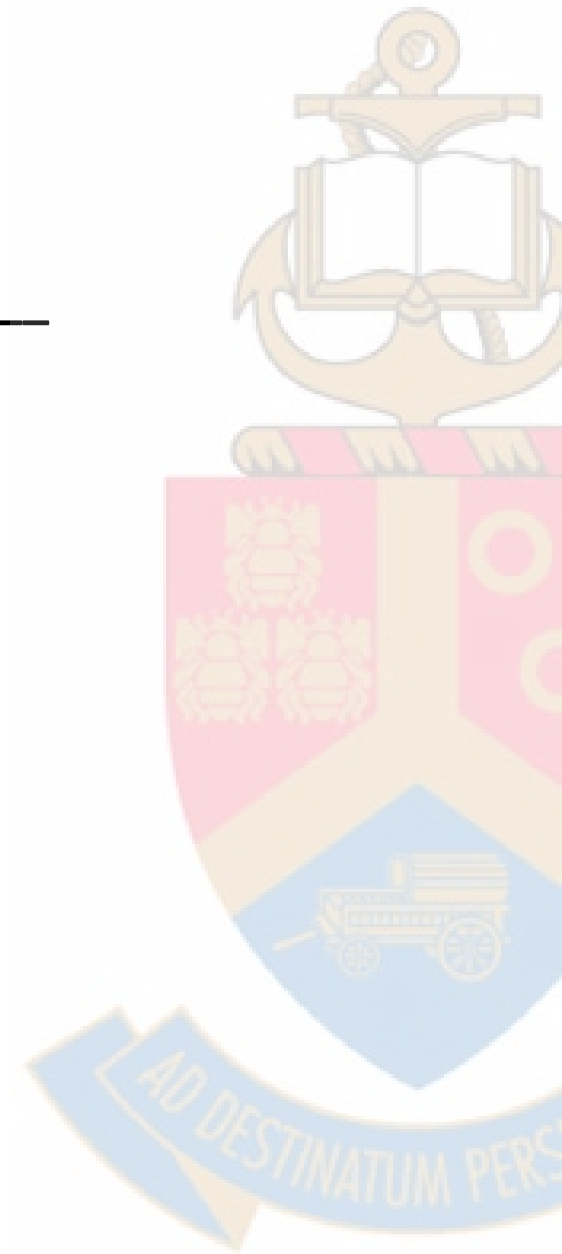

Current Progress – Receiver Design

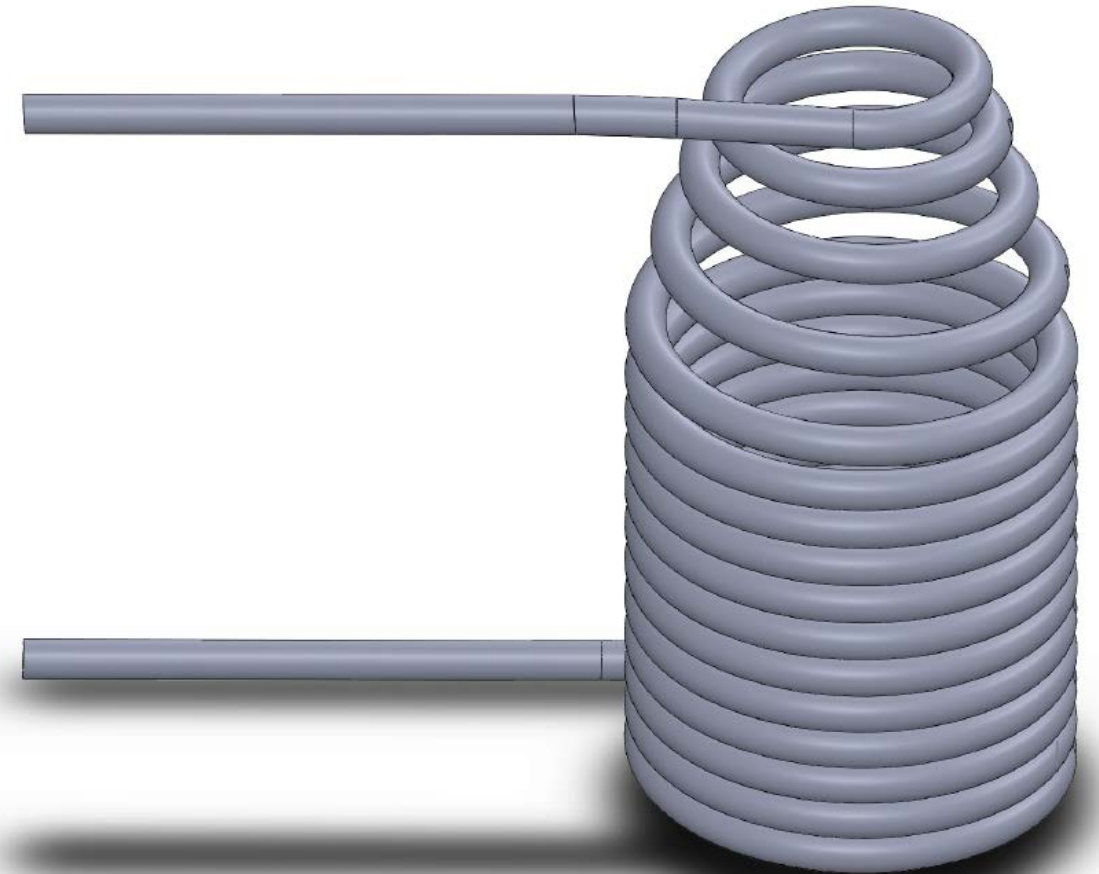



Current Progress – Modular Dish Design


In collaboration with Casey Roosendaal (BEng Honours Mechanical)

- Materials for parabolic dish reflectors are not manufactured locally and are required to be imported.
- Parabolic dish reflectors are limited by the fixed geometry.




Current Progress – Modular Dish Design


In collaboration with Casey Roosendaal (BEng Mechanical Honours)

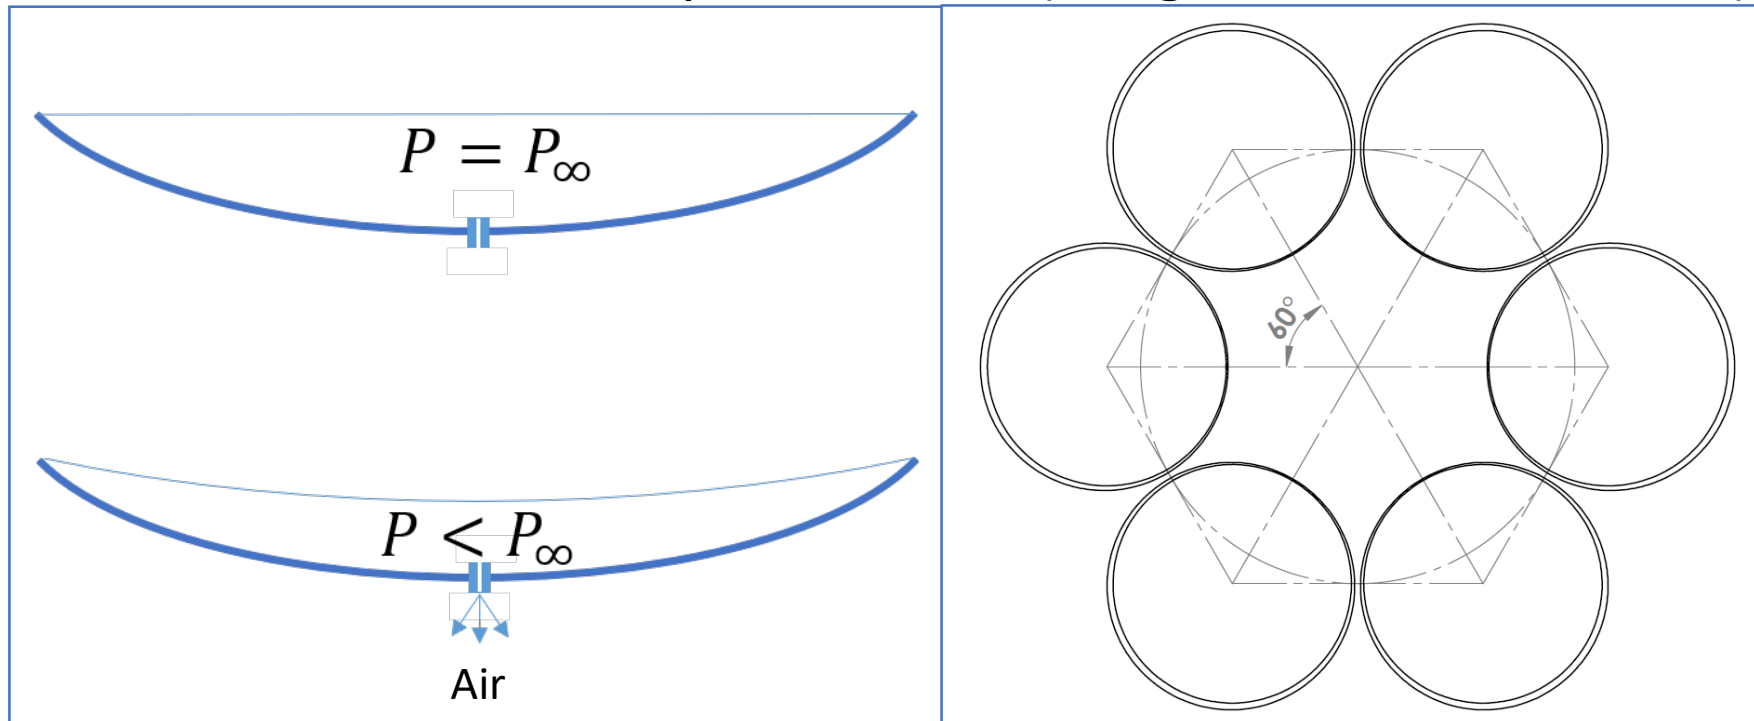


Current Progress – Modular Dish Design

- The new design offers an affordable solution that can be locally manufactured.
- The dish reflector consists of multiple smaller dishes that were described in the previous design.
- The dish reflector is considered to be modular since it allows for the parameterisation of the reflector's effective diameter and effective rim angle.

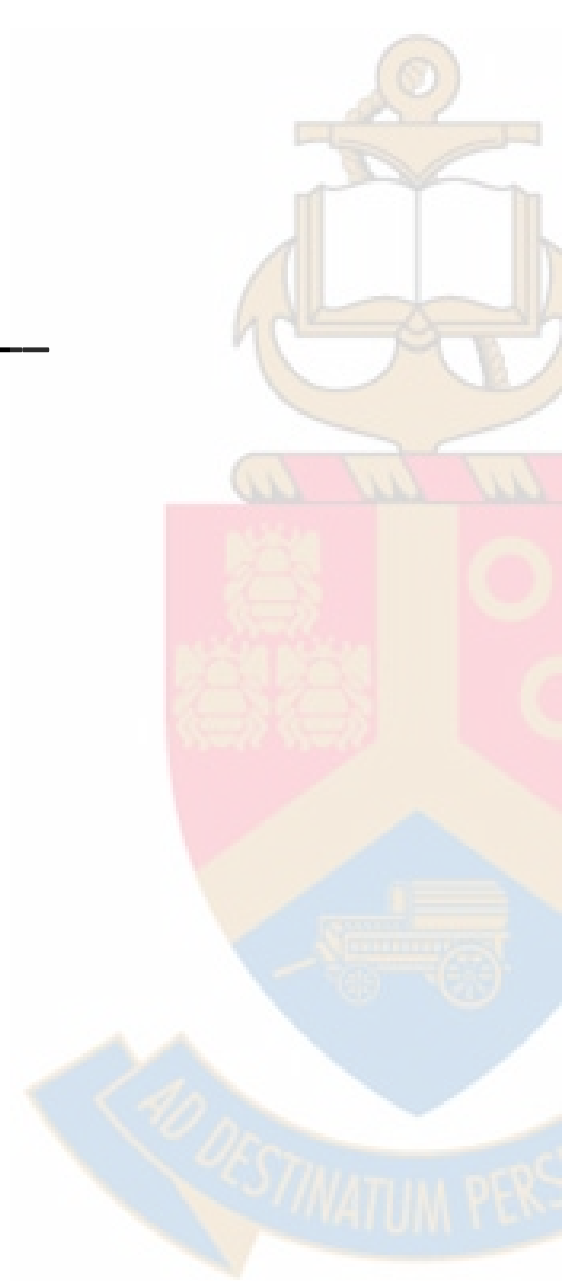

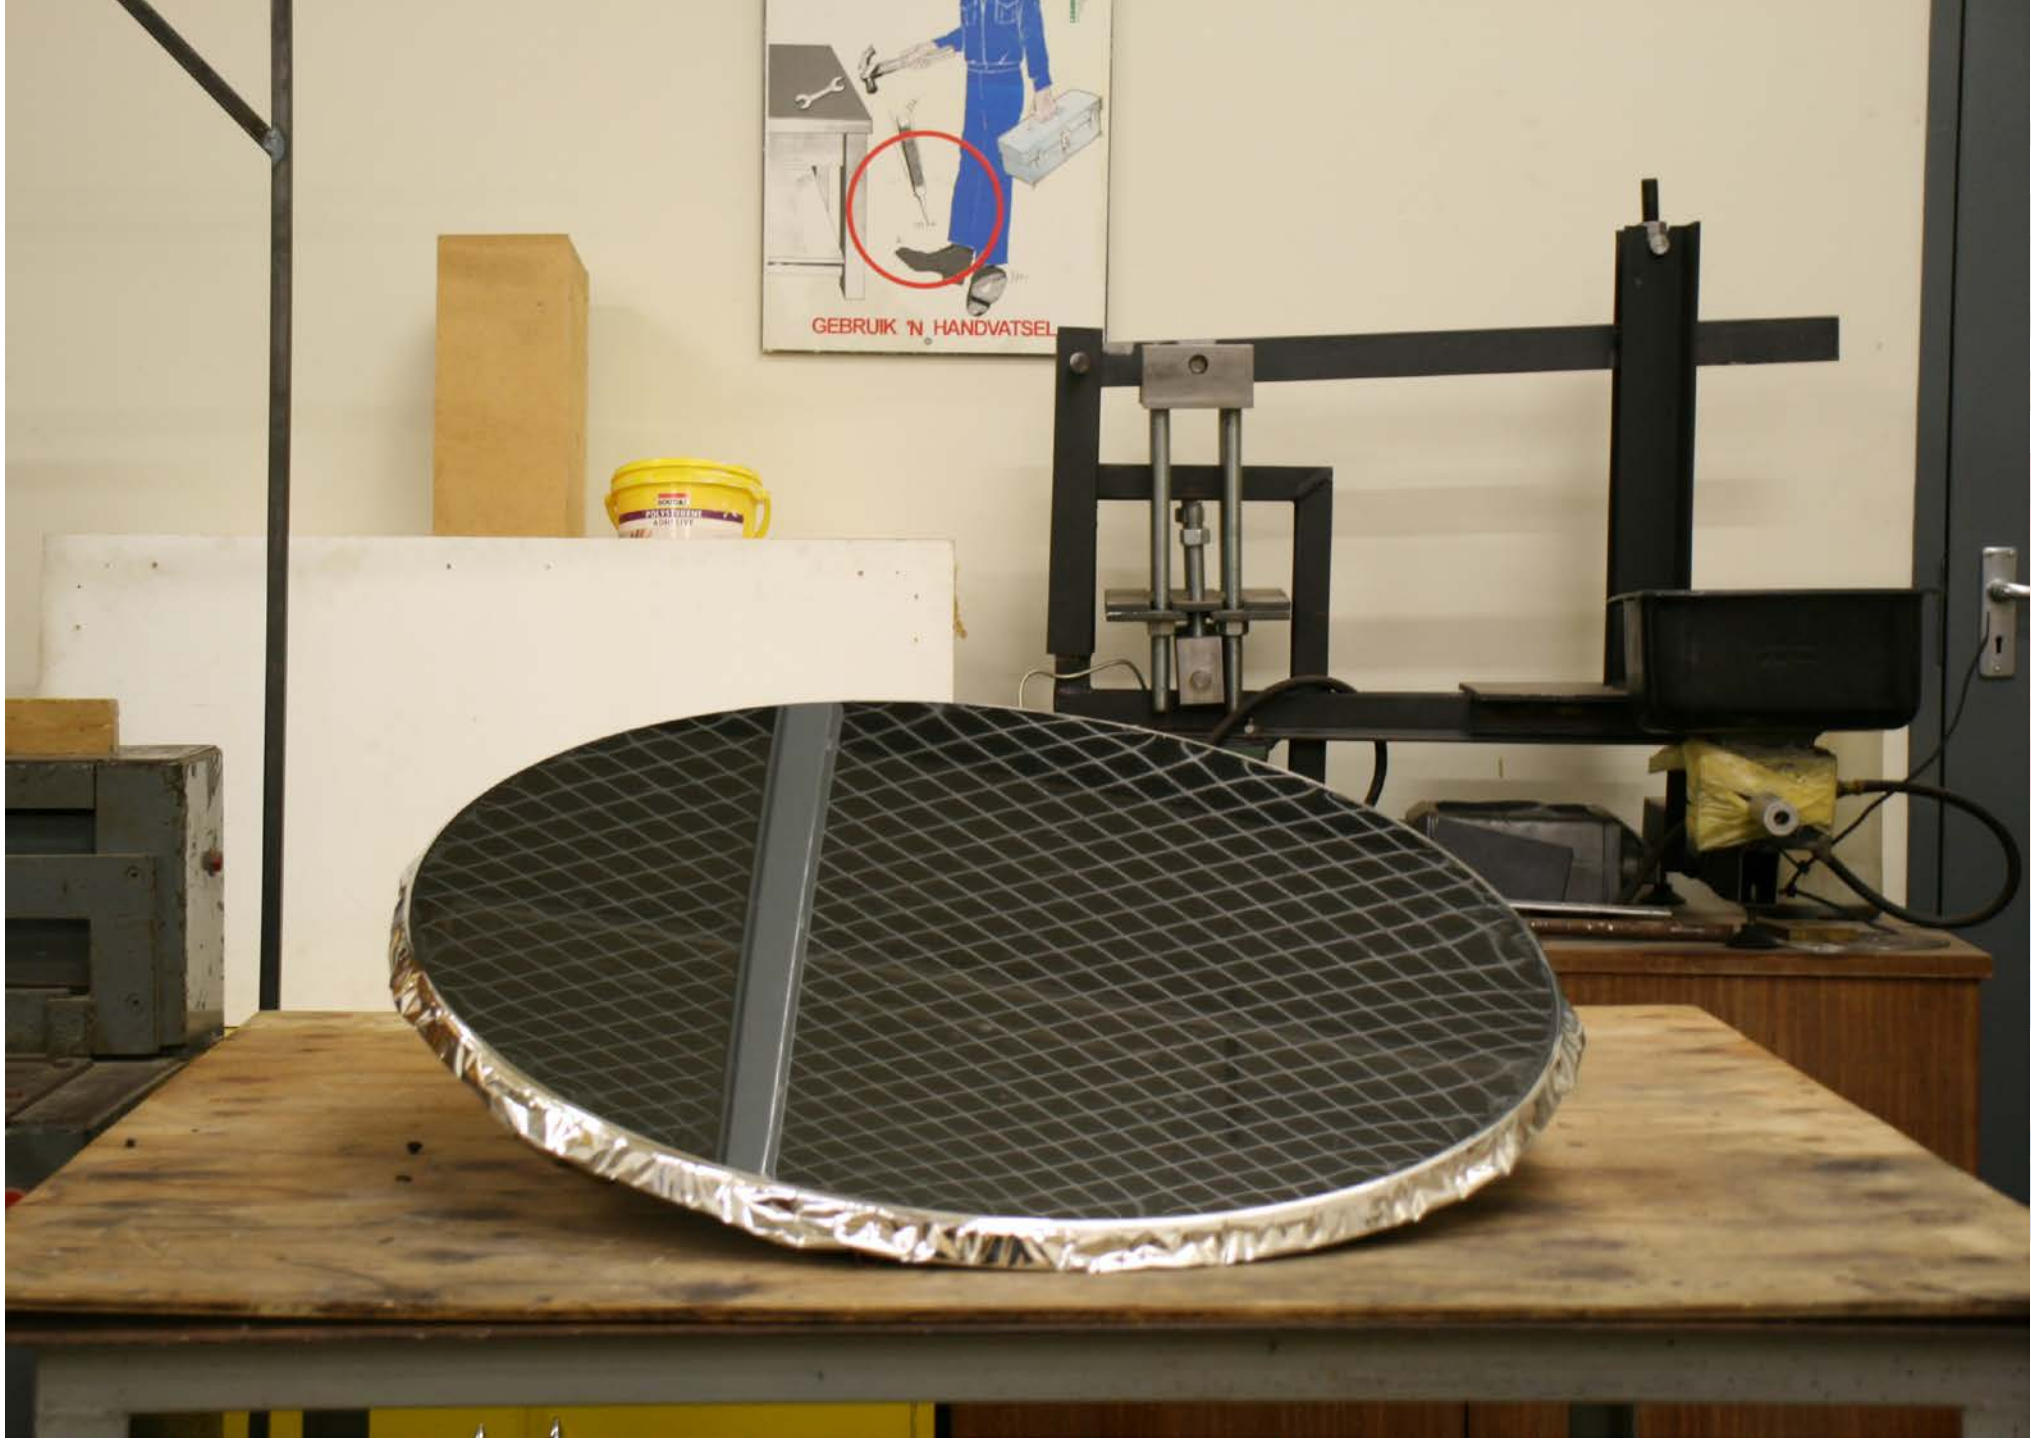


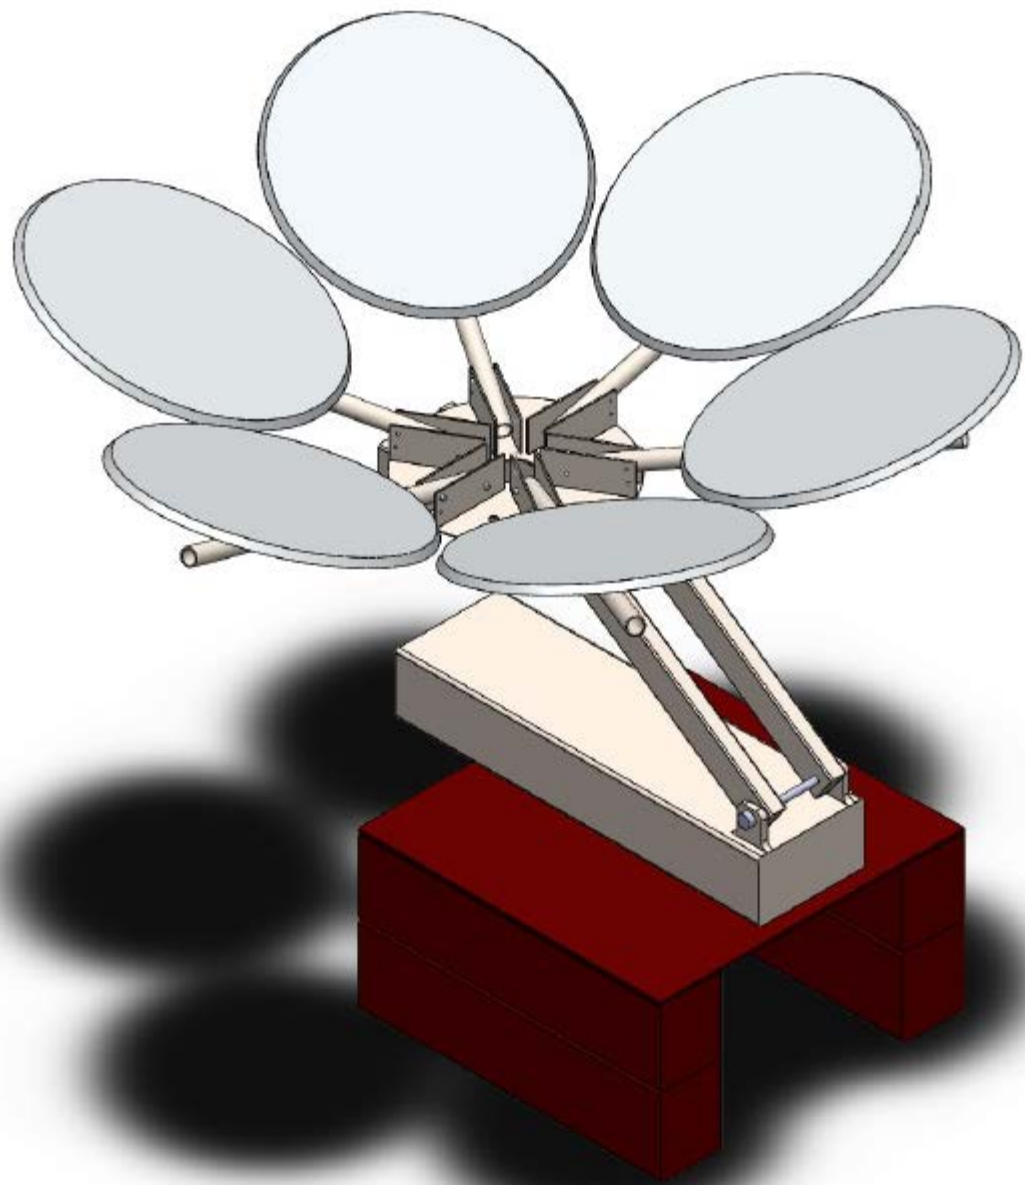


Current Progress – Modular Dish Calibration

- The dish is made to face the moon and an image is reflected onto a near Lambertian target surface.
- The image reflected onto the target surface is used to orientate the dish for an optimum interception factor.
 - Full moon is only necessary if intending to use the calibration results in an optical analysis.
 - The light reflected onto the earth from the moon has a similar angular width to that of the sun.
 - No, cooling is required for the target surface.





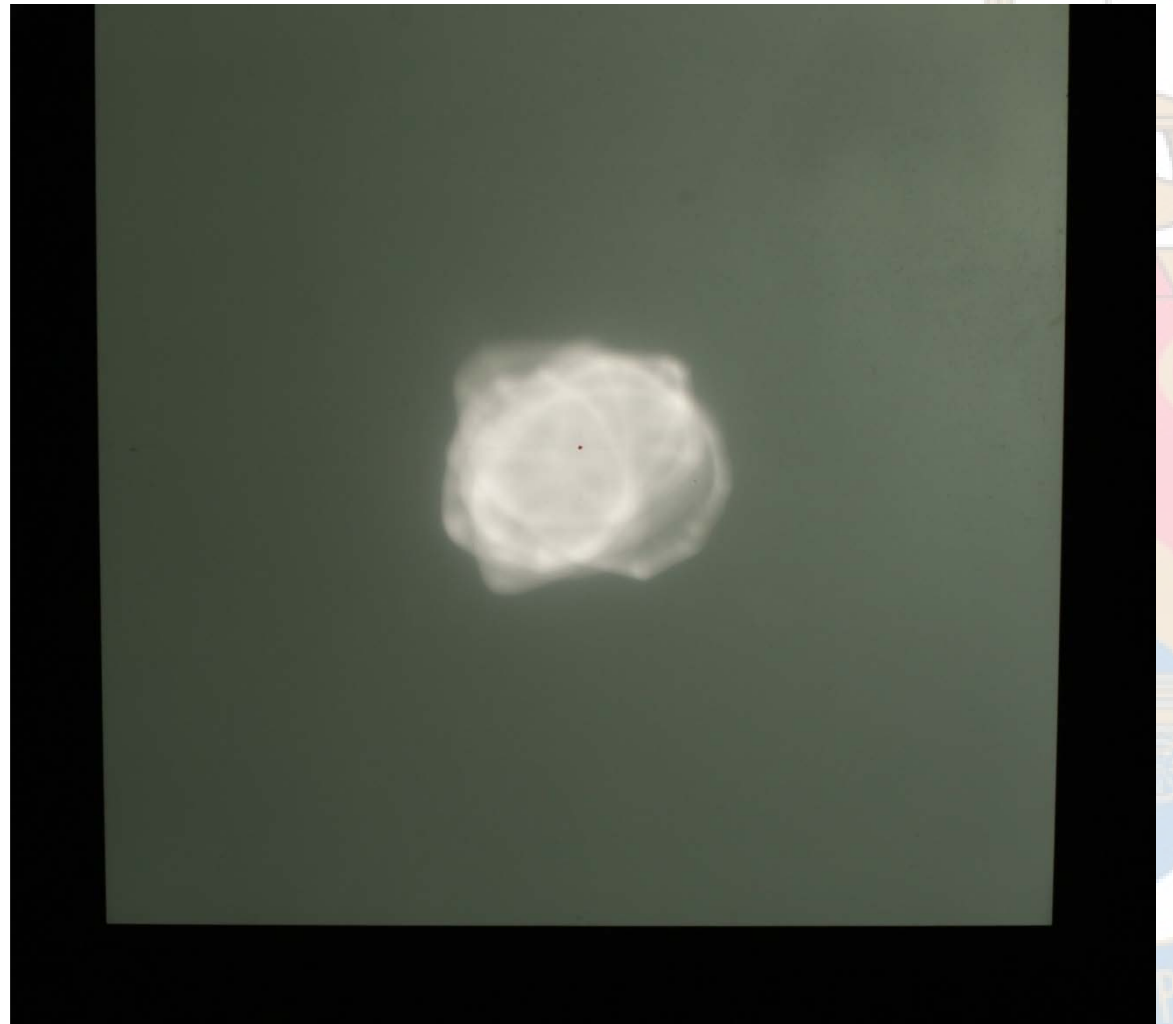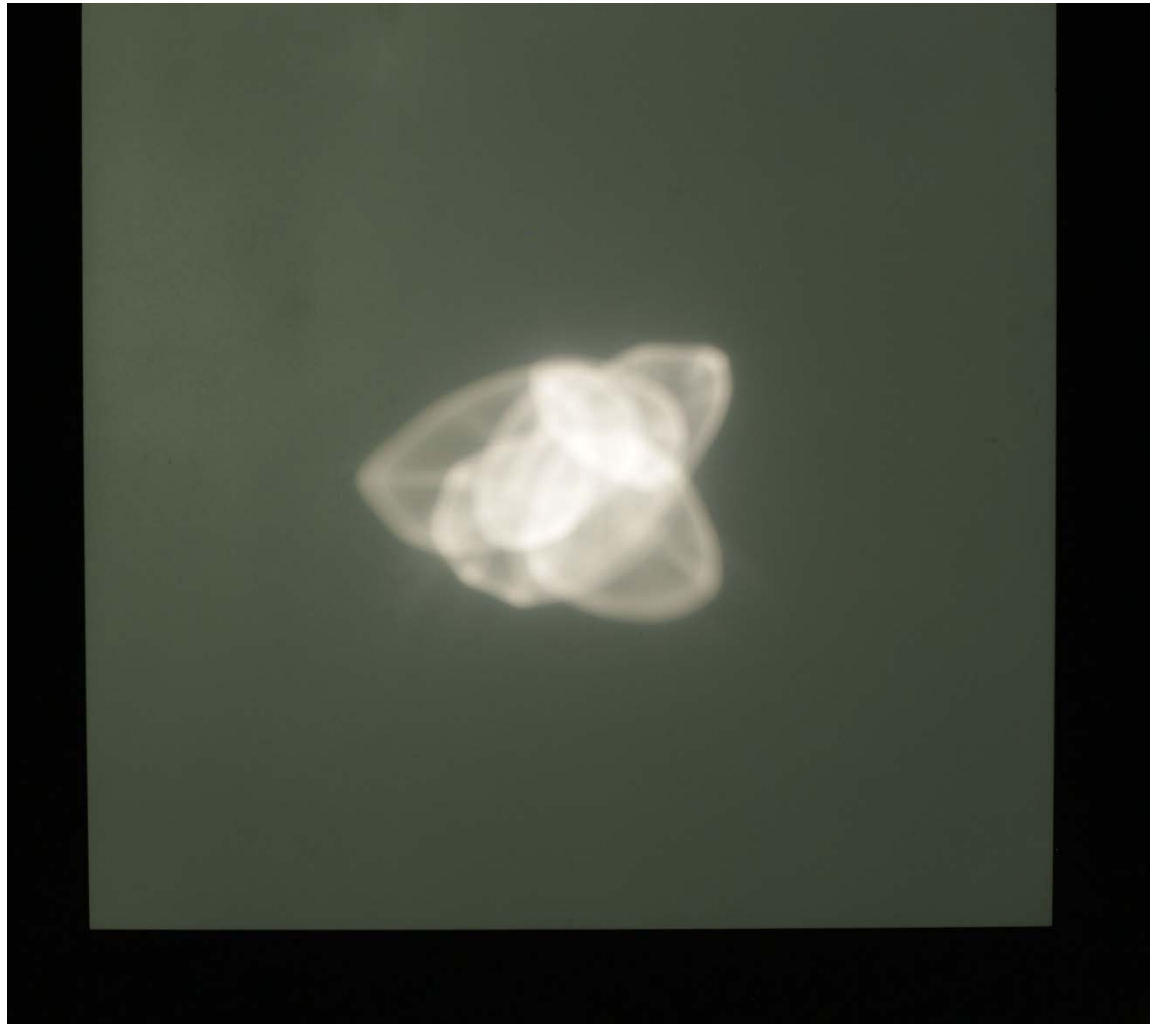

Current Progress – Modular Dish Calibration


- An effective dish diameter and rim angle is obtained after calibration.
- The dish setup is intended to hold its shape over night for testing the next day.



Current Progress – Preliminary Optical Analysis

- In collaboration with Casey Roosendaal.
- Interception factor can be calculated from lunar mapping results (For full moon condition).
- Python's PIL module – “Python Imaging Library” for image processing.
- Pixel intensity (I_{xy}), is a scalar value describing/relating to the intensity of light.

$$I_{xy} = \frac{R_{xy} + G_{xy} + B_{xy}}{3}$$

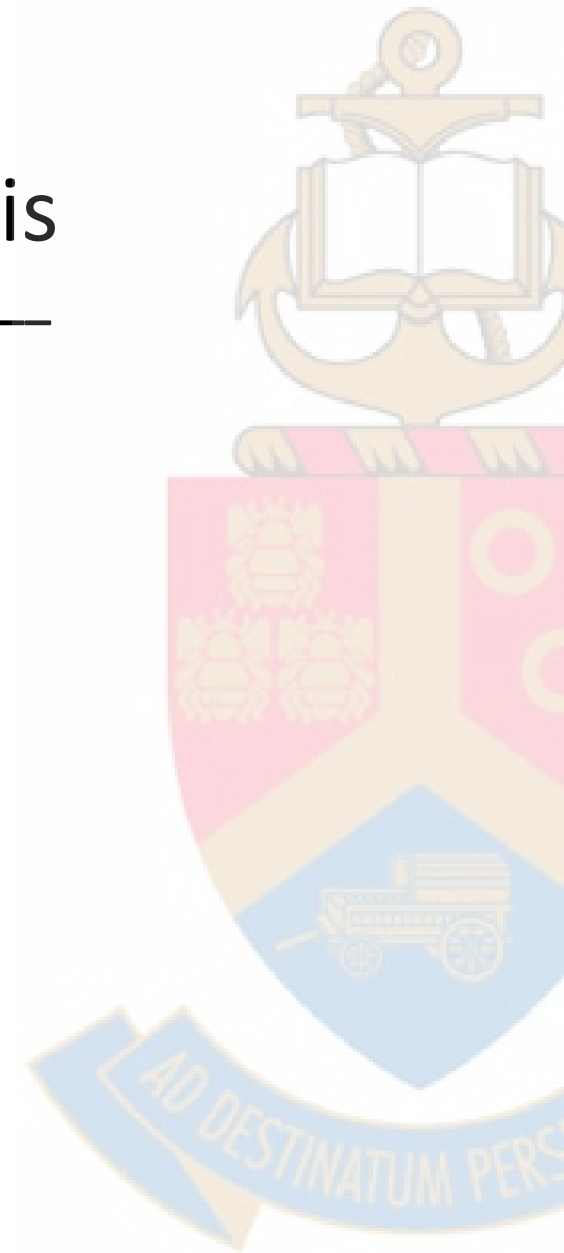

Current Progress – Preliminary Optical Analysis

- Pixel saturation condition:



$$I_{xy} > 255$$

- Calibration and analysis conducted using a CANON EOS 400D

Camera Settings	Values
ISO Setting	100
F number	4.5
Shutter Speed	2''



Current Progress – Preliminary Optical Analysis

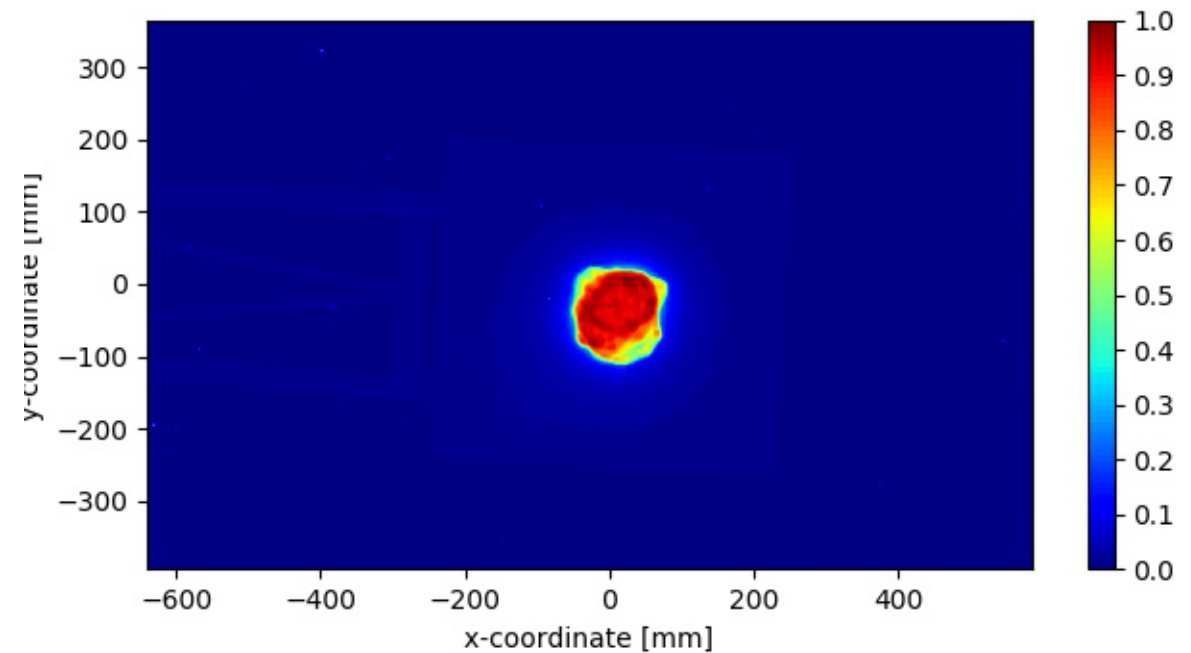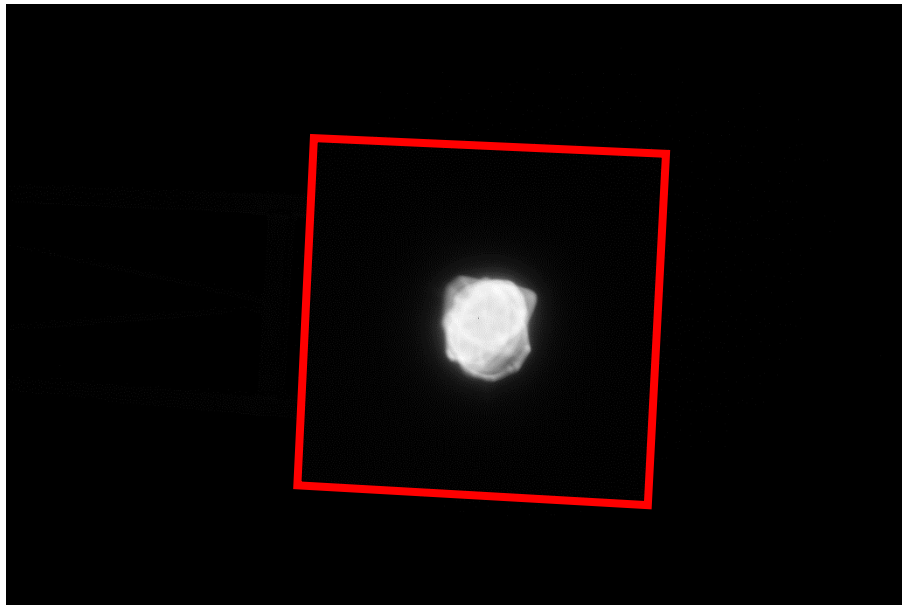


Research to Follow

- Challenges:
 - Mylar sheet reflectivity
 - Light pollution
- Complete optical analysis – Interception factor, SolTrace etc.
- Analysis of the solar receiver for realistic day light conditions.
- Second Law analysis of receiver to determine collector's power potential.



Conclusion

- The research progress made up to current date has been presented.
- A calibration of the modular dish design was conducted.
 - The smaller dishes were positioned to form a modular dish with an effective dish diameter of 1600mm and an effective rim angle of 45°.
 - Assistance is needed to determine the reflectivity of the mylar sheet.

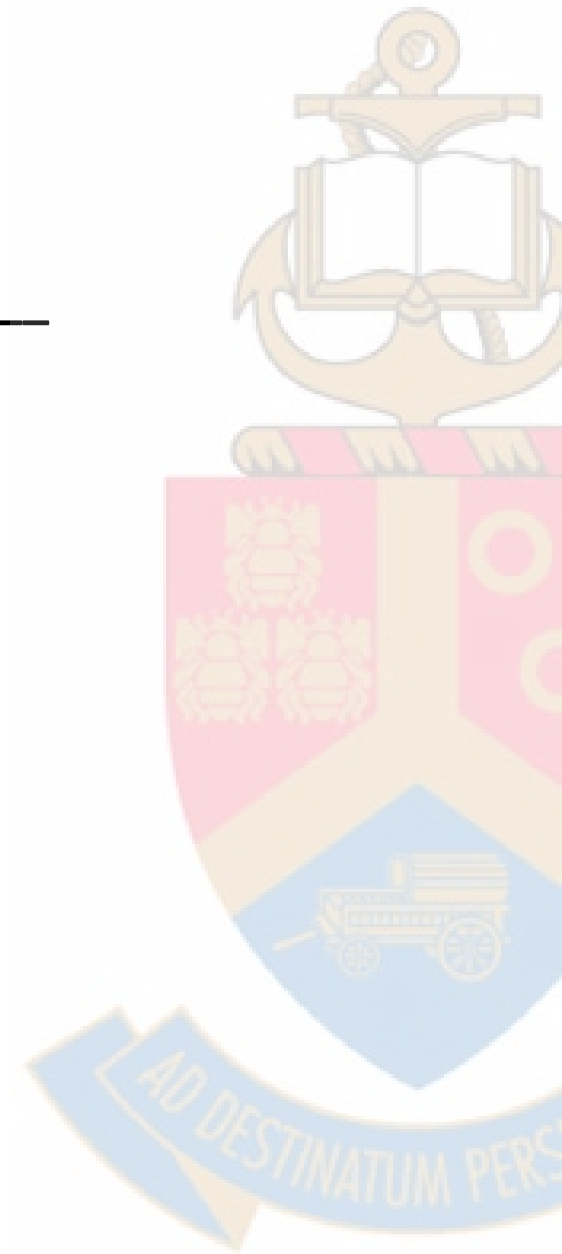

Thank You
&
Questions?

